




## FALL-ARREST MOBILE RUNNER

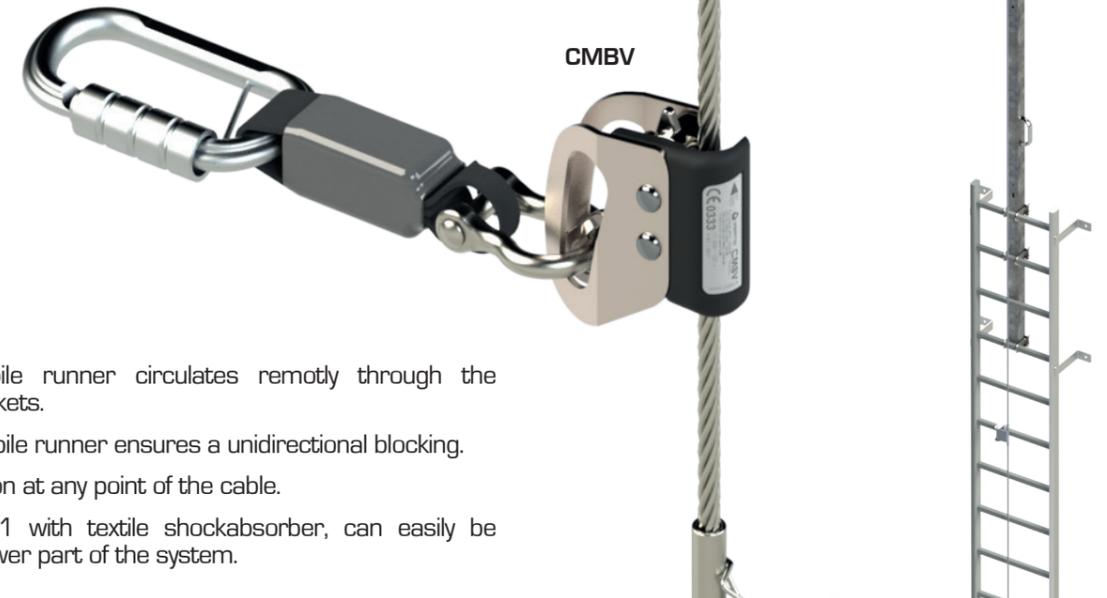

The CMBV mobile runner circulates remotely through the intermediate brackets.

The fall-arrest mobile runner ensures a unidirectional blocking.

Possible connection at any point of the cable.

Certified EN-353-1 with textile shockabsorber, can easily be inserted on the lower part of the system.

## COMPONENTS VERTILIGNE®

<p><b>Crimped extremity bracket</b></p> <p>Extremity bracket of the lifeline with the cable crimped at points.</p>	<p><b>ES2</b></p>	<p><b>SBP</b></p>	<p><b>Wall offset for lower bracket</b></p> <p>Allows fixation on concrete wall.</p>
<p><b>Mobile intermediate bracket</b></p> <p>Gives freedom of movement when travelling. Delivered with 3 sizes of staples to adapt to the ladder rungs.</p>	<p><b>IMV</b></p>	<p><b>PHR2</b></p>	<p><b>Extension bracket</b></p> <p>Attached to the top of the ladder. Facilitates passage of the ladder operator onto the roof.</p>
<p><b>Fixed intermediate bracket</b></p> <p>Delivered with 3 sizes of staples to adapt to the ladder rungs.</p>	<p><b>IFV</b></p>	<p><b>SVH</b></p>	<p><b>Top fixing support</b></p> <p>Allows the fixing on top of the ladders. Compatible with different types of ladder uprights.</p>
<p><b>Cable</b></p> <p>8mm , 7x7 stainless steel cable. VERTIC Bolduc incorporated in the core of the cable for a better traceability.</p>	<p><b>C18</b></p>	<p><b>SHL4</b></p>	<p><b>Bottom fixing support</b></p> <p>Adjustable support for bottom fixing. Compatible with several sizes of uprights.</p>
<p><b>Lower bracket</b></p> <p>Pretensions the cable and enables rapid attachment of the runner on the lower part of the system.</p>	<p><b>EVB3</b></p>	<p><b>SHL1</b></p>	<p><b>Tubular mast fixing</b></p> <p>Standard part usable as top or bottom part. Adjustable model suiting the diameter of the mast.</p>
<p><b>Safety sign</b></p> <p>Must be installed at the access of the system. Allows the identification and the control of the system.</p>	<p><b>PSV</b></p>	<p><b>BAGO1 / ESC8</b></p>	<p><b>Cable-locking ring</b></p> <p>Allow curves and changes of directions. Available in removable or crimped versions.</p>

## PRODUCT BENEFITS

- ▲ Weight capacity by runner: 125 kg maximum (user & tools included)
- ▲ 8m between 2 intermediate brackets
- ▲ **PRATICITY:** can be used by simultaneous people: 3 users at 3 meters distance
- ▲ **VERSATILE:** installation on a wide range of vertical structures
- ▲ **USER-FRIENDLY:** easy runner installation on the cable, even with gloves
- ▲ **SECURE:** includes a tension control device
- ▲ **RESISTANT:** 100% made of stainless steel